


WATER DRIVEN MARINE BLOWERS

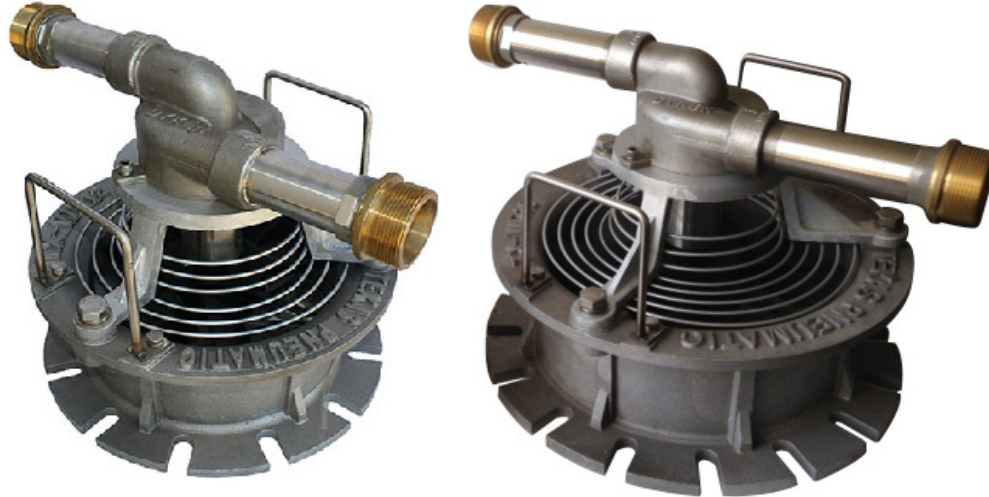

SPECIFICATIONS

MODEL #	Butterworth Flange Diameter	WEIGHT	WATER MOTOR INLET / OUTLET	WATER HOSE CONNECTOR	MAX. WATER PRESSURE (PSI)	BOX HEIGHT	BOX LENGTH	BOX WIDTH	NET SHIPPING WEIGHT
TX-WD12	18" 45.72 cm	56 lbs 25.40 kg	2" fpt	2½" NST (male)	150 psi 10.35 bar	19" 48.26 cm	19" 48.26 cm	19" 48.26 cm	62 lbs 28.12 kg
TX-WD16	22" 55.88 cm	69 lbs 31.30 kg	2" fpt	2½" NST (male)	150 psi 10.35 bar	19" 48.26 cm	23" 58.42 cm	23" 58.42 cm	75 lbs 34.02 kg

Shipped with supply type fan blade unless exhaust blade is specified. Optional exhaust blades can be purchased separately.

PERFORMANCE

MODEL #	OPEN LOOP FLOW DATA				CLOSED LOOP FLOW DATA			
	WATER PRESSURE PSI / BAR	AIR FLOW (Free Flow) CFM / M³/Hr	WATER CONSUMPTION Gal/Min / Lit/Min	AVG. RPM	WATER PRESSURE PSI / BAR	AIR FLOW (Free Flow) CFM / M³/Hr	WATER CONSUMPTION Gal/Min / Lit/Min	AVG. RPM
TX-WD12	100 / 6.89	3,463 / 5,884	160 / 606	4,366	100 / 6.89	2,245 / 3,814	106 / 401	2,827
	125 / 8.62	3,845 / 6,533	182 / 689	4,857	125 / 8.62	2,815 / 4,783	134 / 507	3,552
	150 / 10.34	4,096 / 6,959	193 / 731	5,185	150 / 10.34	3,269 / 5,554	155 / 587	4,097
TX-WD16	100 / 6.89	4,479 / 7,160	156 / 590	2,585	100 / 6.89	3,455 / 5,870	125 / 473	1,981
	125 / 8.62	5,567 / 9,458	190 / 719	3,214	125 / 8.62	4,329 / 7,355	153 / 579	2,491
	150 / 10.34	6,119 / 10,396	209 / 791	3,532	150 / 10.34	5,029 / 8,544	174 / 659	2,900

~ Made in U.S.A. ~

www.airtools.com

Email: tptinfo@airtools.com

TEXAS
1-800-231-9740
254-587-2533 (Int'l calls)

NEVADA
1-800-858-1222

VIRGINIA
1-800-626-1091

MICHIGAN
1-877-575-5733

WATER DRIVEN MARINE BLOWERS

FEATURES:

- ◆ Flow rate independently tested to AMCA Standard 210
- ◆ Stainless steel water motor housing with brass impeller
- ◆ Polymer fan blade for reduced weight
- ◆ Supply fan blade - standard
- ◆ Exhaust fan blade - optional
- ◆ Stainless steel fasteners and fan guard screen

RELATED PRODUCTS



Ducting for use with TX-WD12 and TX-WD16